

GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

• PRODUCT SPECIFICATIONS SHEETS



Shown with hinged glass doors

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity

**Self-Contained
Remote**

**GSR48BM
R-GSR48BM**

**GSR75BM
R-GSR75BM**

**GSR102BM
R-GSR102BM**

Length
Height
Depth with drain cover
(Dimensions are +/-1/4")

52-1/4"
82-1/4"
35-1/2"

78"
82-1/4"
35-1/2"

103-3/4"
82-1/4"
35-1/2"

- Specification subject to change without notice

GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

Standard Specifications and Optional Features

<p>CONSTRUCTION UL Classified to ANSI/NSF 7 Heavy duty construction CFC free foamed in place insulation Removable front grille for easy servicing 2, 3 and 4 door models available Heavy duty easy glide Pike sliding doors</p>	<p>FINISHES Doors-Black vinyl extrusion Exterior-designer white Interior-designer white Rear-coated galvanized</p>
<p>INTERIOR White aluminum ends and back White aluminum floor Aluminum evaporator fan housing 4 heavy duty epoxy coated shelves per door</p>	<p>REFRIGERATION Bottom mounted condensing unit R134a refrigeration 2 & 3 door-capillary tube 4 door-expansion valve Remote available</p>
<p>EXTERIOR White aluminum ends and fronts Double pane glass doors 24-3/4" X 59-1/2" provides wide view display</p>	<p>LIGHTING Vertical light behind mullion 2 Dr = 1 light 3 Dr = 2 lights 4 Dr = 3 lights</p>
<p>ELECTRICAL REQUIREMENTS 2,3 Door Units 115V/60Hz/1Ph Cord and plug 4 Door 115V/208-230V/60Hz/1Ph Unit must be hard wired UL/CUL listed</p>	<p>Important Note: All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.</p> <p>Important Note: Product must be cooled before being displayed within the case.</p>

OPTIONAL FEATURES

<p>Stainless steel, laminate or paint Digital thermometer Extra shelf with clips</p>	<p>Door locks</p>
--	-------------------



GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

Technical Data

Model #	Self contained	GSR48BM	GSR75BM	GSR102BM
	Remote	R-GSR48BM	R-GSR75BM	R-GSR102BM
Length Height Depth with drain cover (Dimensions are +/- 1/4")		52-1/4" 82-1/4" 35-1/2"	78" 82-1/4" 35-1/2"	103-3/4" 82-1/4" 35-1/2"
Operating temperature	Self contained	38°F to 41°F	38°F to 41°F	38°F to 41°F
Refrigerant	Self contained	R134a	R134a	R134a
System Type	Self contained	Capillary tube	Capillary tube	Expansion valve
Compressor size- HP	Self contained	1/3	1/2	3/4
Refrigeration system	Remote	Temperature Control	Temperature Control	Pressure control
BTU's at +20°F Evap. Temp.		2400	4400	5920
Voltage		115V	115V	115/208-230V
Amperage	Self contained	10.1A	13.0A	6.4/7.1A
Amperage	Remote	2.5A	3.3A	4.9A
Cord and plug		Yes	Yes	No
Exterior color		White	White	White
Interior color		White	White	White
Inside end panels		White	White	White
Floors		White	White	White
Drain Electric Condensate		Yes	Yes	Yes
Total shelves		8	12	16
Door size		24-3/4"X59-1/2" (2)	24-3/4"X59-1/2"(2)	24-3/4"X59-1/2"(4)
Cubic capacity (ft ³)		48	26-1/6"X59-1/2"(2) 75	102


SHIPPING INFORMATION

Height		86"	86"	86"
Length		56"	84"	109"
Depth		44"	44"	44"
Gross weight	Self contained	570#	790#	1075#
	Remote	559#	665#	925#
Cubic feet		77ft ³	125ft ³	236ft ³

- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Specification subject to change without notice

GSR Series - Reach In Sliding Glass Door Refrigerators - Bottom Mount

Technical Data • Side View • Plan View

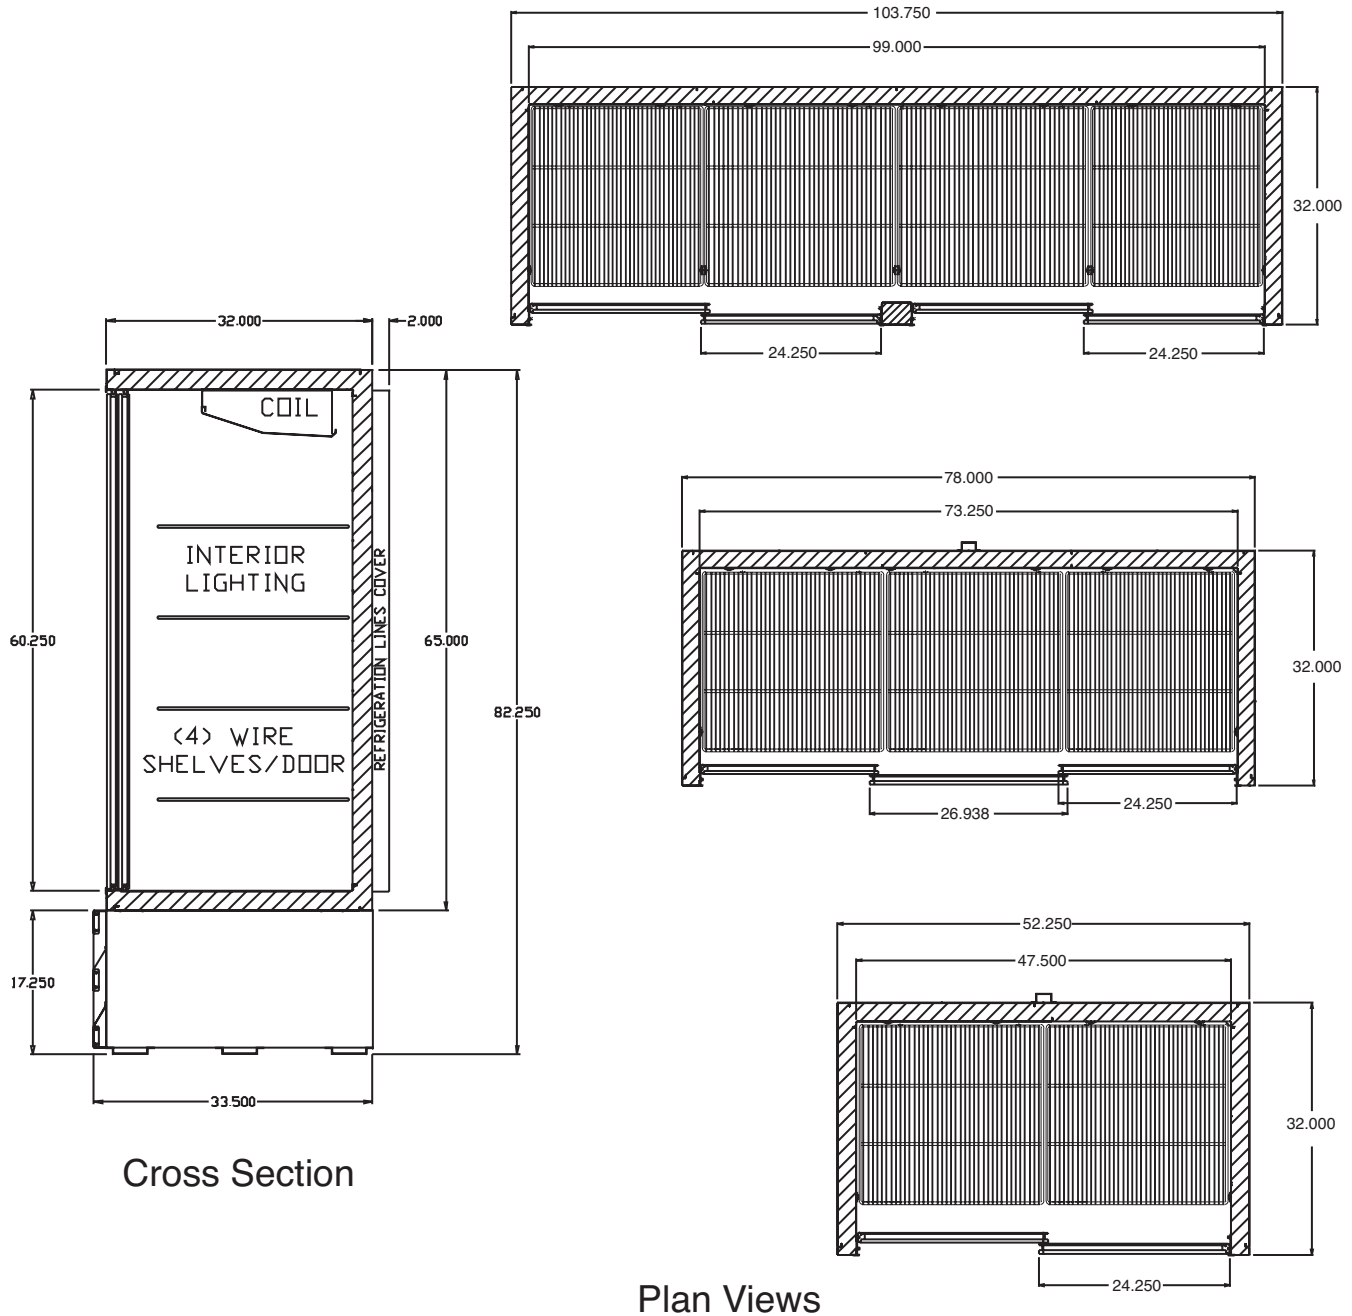

Cross Section

Plan Views